


BRIGGS IRRIGATION & EFFLUENT ROTARY LOW PRESSURE TRAVELLING IRRIGATOR



Model	DESCRIPTION	Code	Price
MODEL 10 Fully Galvanised	EFFLUENT APPLICATOR <u>Non</u> - FOLDING BOOM Hose Size 50mm x 100mets (Max Run Lth 200mets) Flow 120 to 360 LPM (26.5 to 79 GPM) Wetted Width 25 mets. Boom Length 7 mets. Pressure required 1 - 2 Bar (15 - 30 PSI) Auto Stop at end of run. 50mm BSPF inlet. 3 Travel Speeds (4 to 18 hours) HOSE NOT INCLUDED	360010	\$ 8,190.00
MODEL 15 Fully Galvanised	EFFLUENT APPLICATOR FOLDING BOOM Hose Size 63mm x 150mets (Max Run Lth 300mets) Flow 108 to 500 LPM (24 to 110 GPM) Wetted Width 35 mets. Boom Length 15 mets. Pressure required 1.3 to 2 Bar (20 to 30 PSI) Auto Stop at end of run. 50mm BSPF inlet. 5 Travel Speeds (17 to 85 mets per hour) HOSE NOT INCLUDED	360015	\$ 12,800.00
MODEL 25 Fully Galvanised	EFFLUENT IRRIGATOR FOLDING BOOM Hose Size 65 to 80 mm Hose Length 150 to 200 mets Flow 366 to 916 LPM (80 to 200 GPM) Wetted Width 45 mets. Boom Length 20 mets. Pressure From 2.75 Bar (40 PSI) 6 Travel Speeds HOSE NOT INCLUDED	360025	\$ 31,000.00
MODEL 25 Fully Galvanised	EFFLUENT IRRIGATOR <u>Non</u> - FOLDING BOOM Hose Size 65 to 80 mm Hose Length 150 to 200 mets Flow 366 to 916 LPM (80 to 200 GPM) Wetted Width 55 mets. Boom Length 30 mets. Pressure From 2.75 Bar (40 PSI) 6 Travel Speeds HOSE NOT INCLUDED	360026	\$ 34,000.00

- Fully galvanised strong chassis.
- Low Boom Height – minimize wind drift.
- To suit Irrigation, Dirty Water or Effluent Applications.
- Low Energy Requirements.
- Low Pressure Requirements.

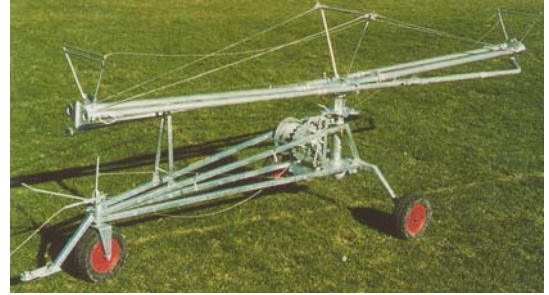